

(12) UK Patent Application (19) GB (11) 2 183 217 (13) A

(43) Application published 3 Jun 1987

(21) Application No 8626894

(22) Date of filing 11 Nov 1986

(30) Priority data

(31) 8528138

(32) 14 Nov 1985

(33) GB

(71) Applicant

Merck & Co Inc

(Incorporated in USA—New Jersey)

126 East Lincoln Avenue, Rahway, New Jersey 07065,
United States of America

(72) Inventor

Ronald George Saffron

(51) INT CL⁴

G01F 11/26

(52) Domestic classification (Edition I):

B8N L

U1S 1310 B8N

(56) Documents cited

None

(58) Field of search

B8N

Selected US specifications from IPC sub-class G01F


(74) Agent and/or Address for Service

D. Young & Co.


10 Staple Inn, London WC1V 7RD

(54) Dosage device

(57) A dosage device 1 for the delivery of a measured quantity of a liquid or flowable paste, such as a medicament, comprises a cup component 4 and a compartmented component 11 which is secured within the cup component 4 and rotatable with respect thereto about an axis, the cup component 4 having a radial base wall 5 with an opening 6 radially offset from the axis, the compartmented component 11 having axially extending walls 17, 19 bounding a plurality of compartments 18 each of which has an open end and each of which can be brought, by relative rotation of the two components 4 and 11, into alignment with the base wall opening 6, each compartment having in its outer wall an outlet 18a which is at a respective different axial spacing from its open end, the cup component 4 and that outer wall bounding a dispensing space 16 to receive liquid or flowable paste from the compartment 18. In use, the bottle is squeezed and liquid passes up dip tube 9, through orifice 6, into space 18, through aperture 18a into space 16. Release of the bottle creates suction which returns liquid to the bottle except for the amount below aperture 18a into space 16. This dose is dispensed by tilting the bottle.

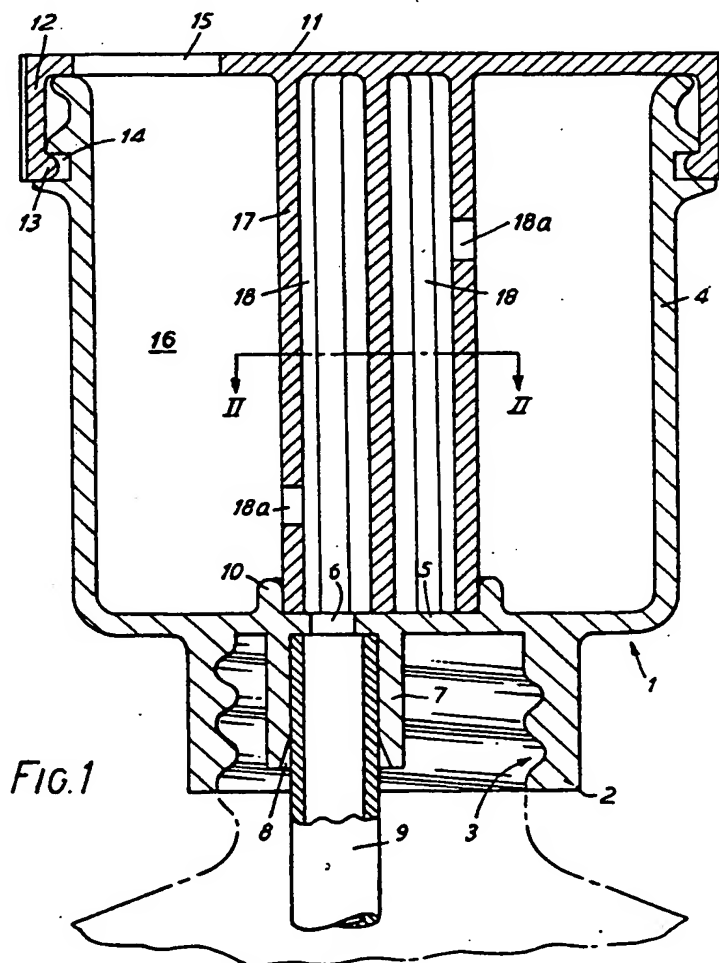

GB 2 183 217 A

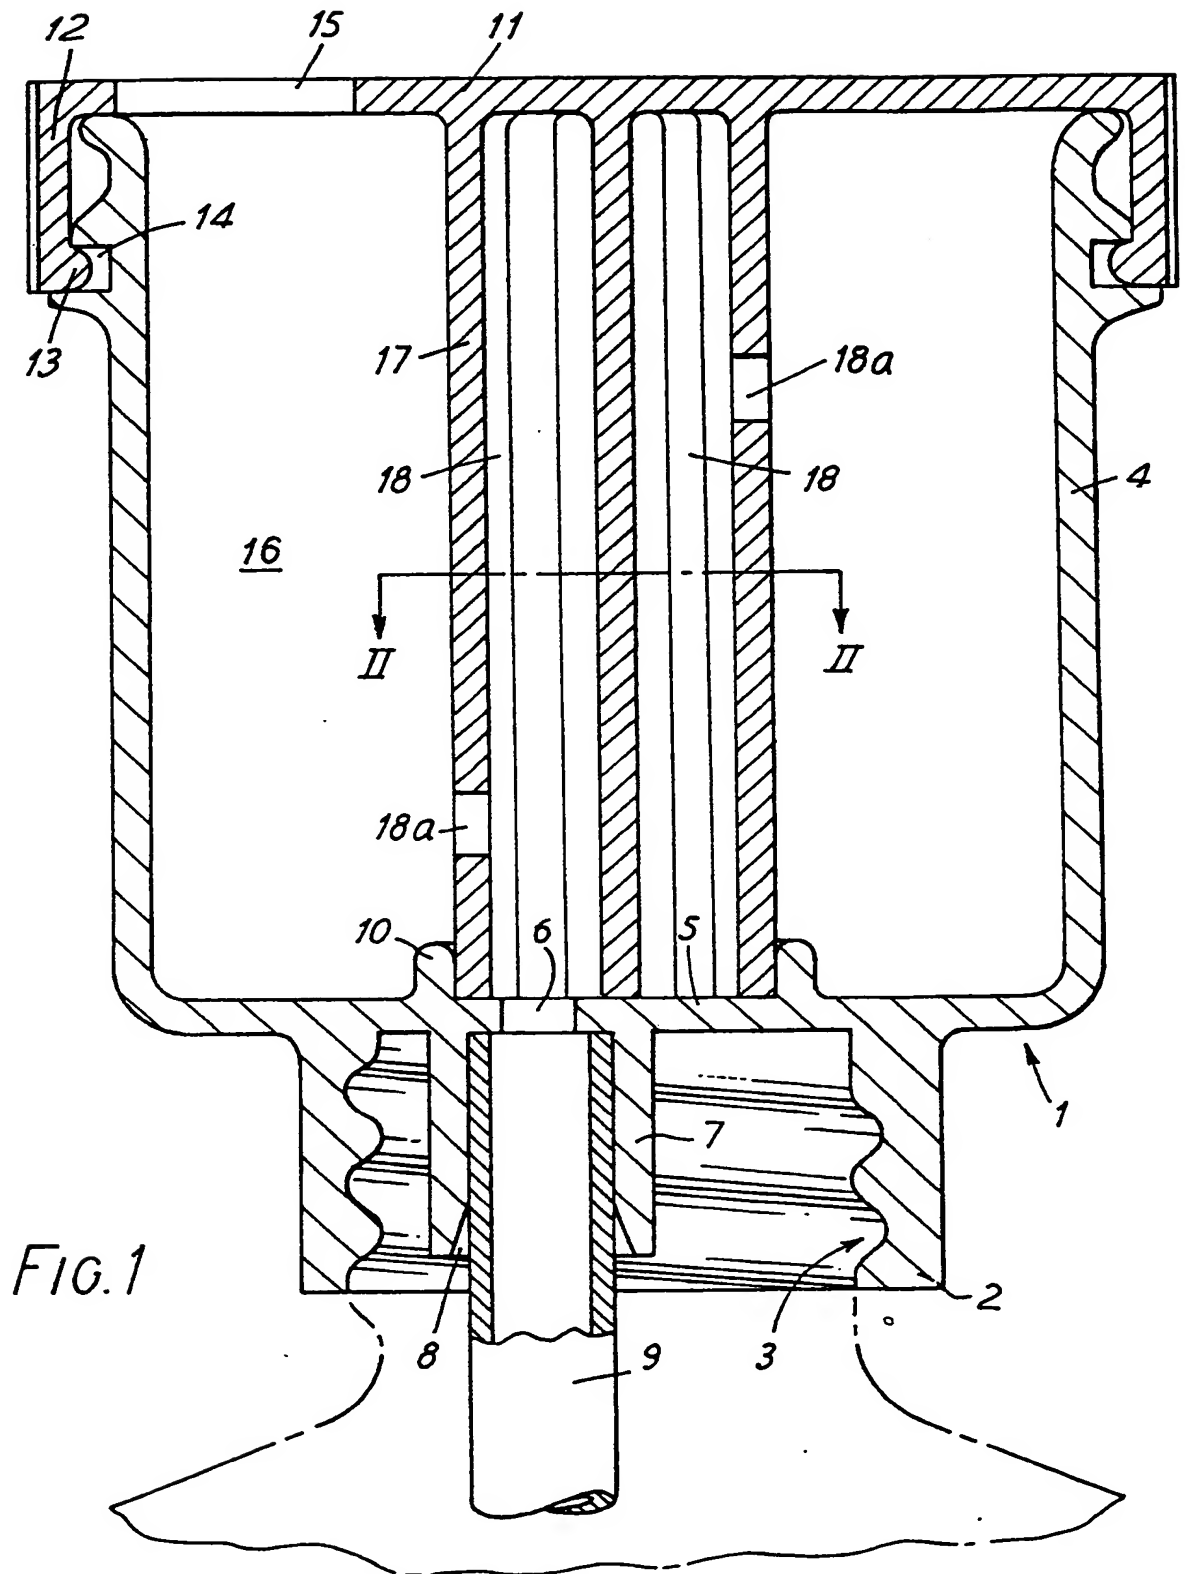

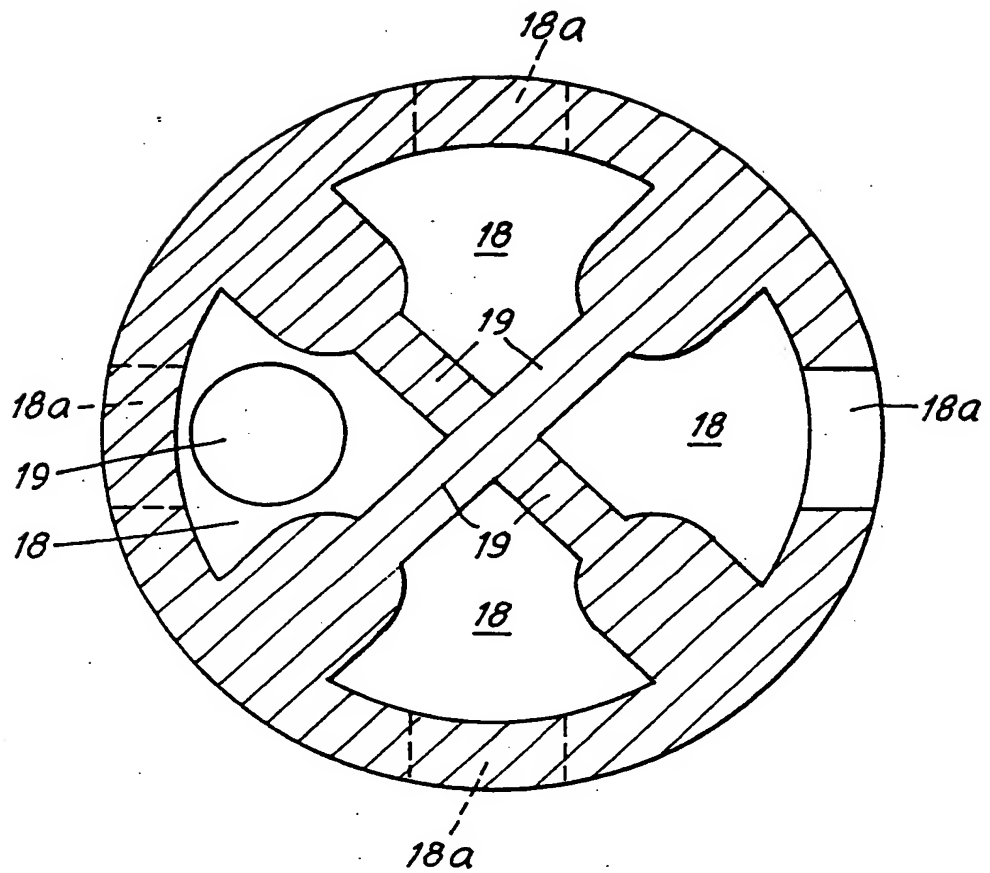
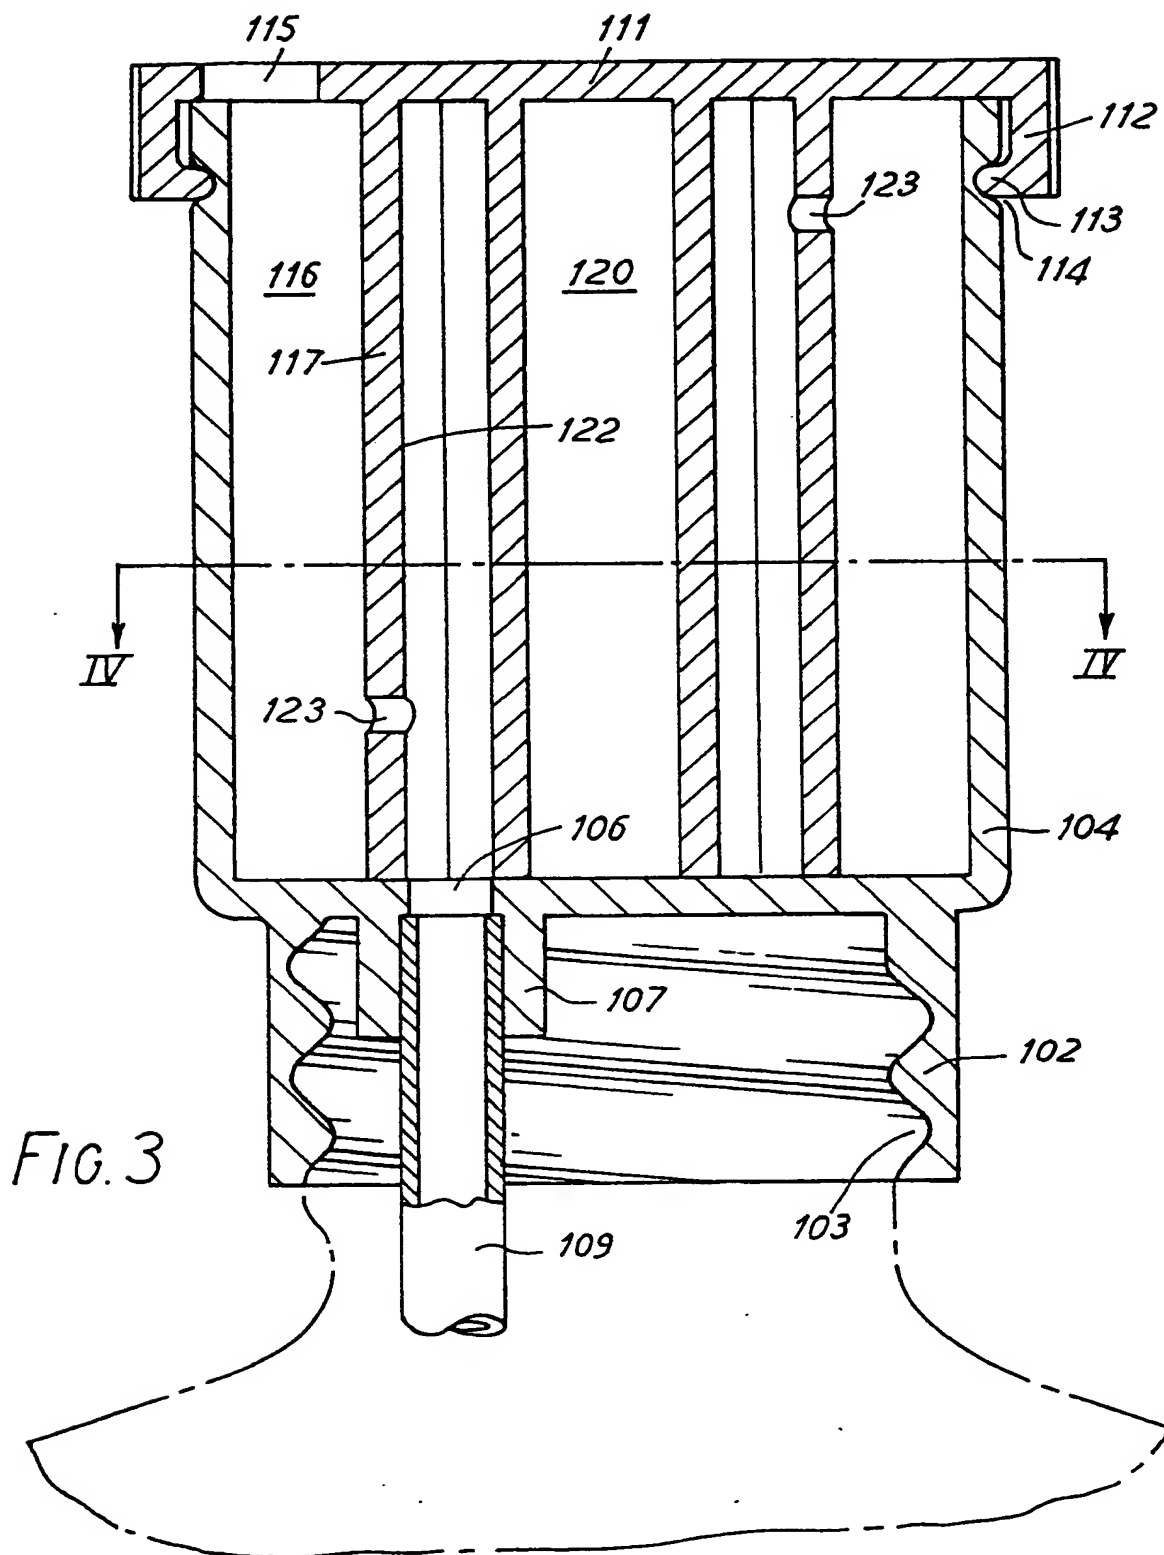


FIG. 2



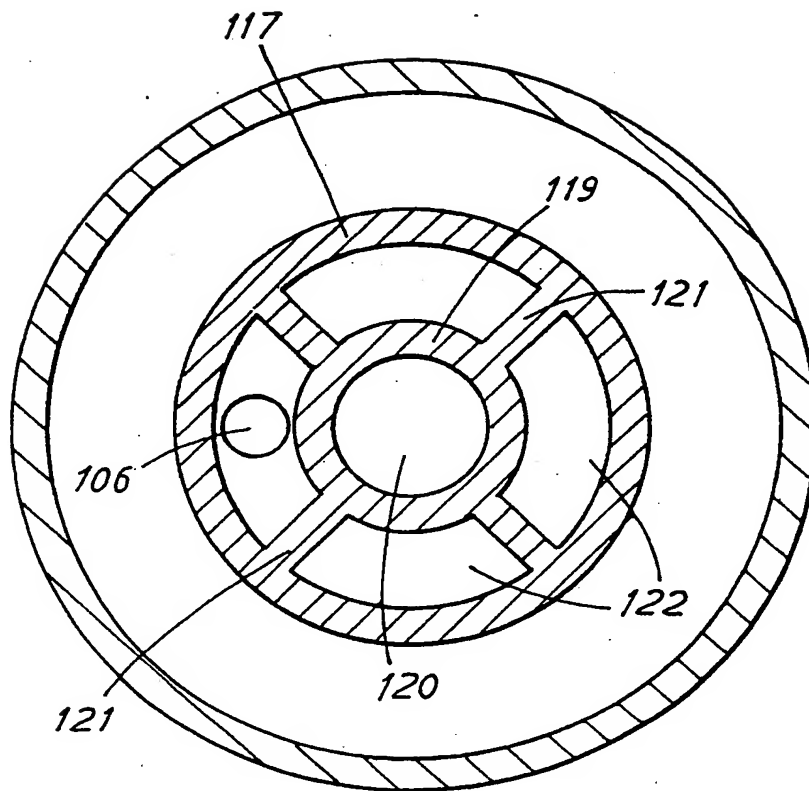


FIG. 4

SPECIFICATION

Dosage device

- 5 This invention relates to a device for the delivery of any selected one of a plurality of different quantities of liquid or flowable paste, e.g. a medicament.

- According to the present invention a dosage device for the delivery of a measured quantity of a liquid or flowable paste comprises a cup component and a compartmented component each including respective means coaxing to secure said compartmented component assembled within said cup component but relatively rotatable with respect thereto about an axis, said cup component including a radially extending base wall having an opening which is radially offset from said axis, said compartmented component including axially extending wall means bounding a plurality of compartments each having an open end of which can be brought selectively, by relative rotation of the two components, into a position of alignment of its open end with said base wall opening, an outer wall portion bounding each compartment including an outlet disposed at a respective different axial spacing from said open end, said cup component and said outer wall portion bounding a dispensing space.

- As will appear from the discussion below of preferred embodiments of the present invention, the dosage device can be manually operated so that the quantity of medicament to be delivered can be determined by simple manual rotation of a component, e.g. a cap, with respect to a delivery cup, to a selected one of a predetermined number of rotary positions.

- With such a dosage device, when fitted onto a means for dispensing liquid, e.g. a squeeze bottle, liquid or paste is firstly forced through a selected aligned compartment and into the dispensing space. Then suction is applied to the supply, e.g. by releasing the squeeze bottle, to cause the liquid or paste to be sucked back into the supply. Assuming that the dosage device is kept with its axis substantially vertical, the liquid or paste will flow back out of the dispensing space down to the level of the outlet of the compartment selected, so as to leave the respective measured quantity in the dispensing space. Thereafter the device can be tilted to dispense that quantity out of the dispensing space.

- In a preferred form of construction, the cup component includes a side wall which bounds the dispensing space, and the compartmented component includes a top wall abutting the side wall and forming a cap having a pouring opening. The coaxing securing means may comprise respective tenon and recess formation on said side wall and top wall, e.g. to provide a resilient "snap-fit".

To facilitate use if the dosage device with a dip tube, the base wall may have a depending tubular flange, corresponding to its opening, to receive the dip tube, e.g. as a push-fit therein.

- To facilitate use of the dosage device with a squeeze bottle having a neck with external threading, the device may have a depending neck, e.g. on the base wall, with internal threading to engage with the threading of the bottle.

- In a first embodiment, the axially extending wall means of the compartmented component are constituted by a tube traversed by radial walls, and to enhance sealing and location of the end of said tube with respect to the base wall, the base wall may carry an upstanding ring flange with which the end of the tube is slidably engaged.

- In another embodiment, the axially extending wall means of the compartmented component are constituted by two tubes disposed at a spacing one within the other and with radial walls traversing the space between them.

- In order that the nature of the invention may be readily ascertained, two embodiments of dosage device in accordance therewith are hereinafter particularly described with reference to the figures of the accompanying drawings, wherein:

Figure 1 is an axial section of a first embodiment;

Figure 2 is a radial section, to a larger scale, taken on the line II-II of Fig. 1;

- Figure 3 is an axial section of a second embodiment;

Figure 4 is a radial section taken on the line IV-IV of Fig. 3.

- Referring to Figs. 1 and 2, the dosage device is intended for attaching to a source of supply of a flowable substance such as a medicament. The dosage device, denoted as a whole by reference numeral 1, has a neck 2 with an internal thread 3 which can engage onto a corresponding male thread of a neck of a squeeze bottle.

- The dosage device 1 comprises two components which are relatively rotatable but which are captive one within the other. A first component 4 is in the form of a cup with a base wall 5 carrying the neck 2. The base wall 5 has an opening 6, and concentric with the opening there is a flange 7 which is chamfered at 8 and which is adapted to receive the upper end of a dip tube 9 as a tight push fit. Within the cup 4, the base wall 5 has an upstanding ring flange 10 which is concentric with the cup. The other component 11 includes a cap portion which has a depending side wall 12 with a tenon or bead 13 to engage into a recess 14 about the periphery of the upper end of the side wall of the cup 4 so as to retain the cap as a snap fit on the cup 4.

- The top wall of the cap is apertured at 15.

to provide a pouring opening from the space 16. The component 11 has a central cylindrical wall 17 the internal volume of which is divided into four compartments 18 by

5 transverse radial walls 19 arranged at 90° to each other, as seen in Fig. 2. Each compartment 18 communicates with the dispensing space 16 through a respective opening 18a which is arranged at a different height along
10 the axis of the central wall 17.

The component 11 can be rotated manually with respect to the cup 4 so as to bring any selected one of the compartments 18 into correspondence with the opening 6.

15 In use, the dosage device is screwed firmly onto the neck of a bottle containing the liquid or paste to be dispensed. The bottle is, for example, a squeeze bottle, so that by applying suitable pressure by hand to the bottle, the
20 liquid can be forced up through the dip tube 9 and through the opening 6 into whichever of the compartments 18 happens to be aligned with the opening 6. The liquid will then flow through the respective opening 18a into the
25 dispensing space 16. When the hand pressure is released on the squeeze bottle, the liquid is sucked back down again from the compartment 18, and from the space 16, until the level of the liquid in the space 16 has fall just
30 to the level of the lower lip of the opening 18a.

The liquid remaining thereafter in the dispensing space 16 constitutes a measured dosage which can be dispensed by tilting the
35 device to pour the liquid out through the aperture 15. As the openings 18a are disposed at different heights for each of the compartments 18, the liquid resting in the space 16, after the sucking back operation has been carried out, will be greater or lesser in quantity
40 accordingly.

Referring now to Figs. 3 and 4, the construction and operation of the dosage device are similar to what has been described above
45 for the construction of Figs. 1 and 2. The structural difference is that there is provided a tubular wall 117, corresponding to the wall 17 of Figs. 1 and 2, and a second concentric inner tubular wall 119 arranged within the wall
50 117.

The inner wall 119 is joined to the wall 117 by four radial walls 121 which serve to divide the interior space, defined between the two walls 117-119, into four compartments 122.

55 The internal space 120 does not serve to receive any liquid. Each compartment 122 communicates through a respective aperture 123, arranged at different heights, with the space 116. The selection of dosage quantity and the
60 operation of the device with a squeeze bottle, are otherwise the same as with the construction of Figs. 1 and 2.

In each of the constructions described, the cap may advantageously carry an index, and
65 the cup may have circumferentially spaced

"quantity marks", or vice versa, to permit the user to select a quantity to dispense.

To facilitate correct rotational setting of the cap, the cup and the cap may have coacting
70 tenon and recess means, such as dimples, which will click into precise settings as the cap is rotated. Further, stop means may be provided to act between the cap and the cup to provide end stops of limit of rotation of the
75 one with respect to the other.

CLAIMS

1. A dosage device, for the delivery of a measured quantity of a liquid or flowable
80 paste, comprising a cup component and a compartmented component, said cup component and said compartmented component each including respective means coacting to secure said compartmented component assembled
85 within said cup component but relatively rotatable with respect thereto about an axis, said cup component including a radially extending base wall having an opening which is radially offset from said axis, said compartmented
90 component including axially extending wall means bounding a plurality of compartments each having an open end and each of which can be brought selectively, by relative rotation of the two components, into a position of
95 alignment of its open end with said base wall opening, an outer wall portion bounding each compartment including an outlet disposed at a respective different axial spacing from said open end, said cup component and said outer
100 wall portion bounding a dispensing space.

2. A dosage device, as claimed in claim 1, wherein said cup component includes a side wall which bounds said dispensing space, and
105 wherein said compartmented component includes a top wall abutting said side wall and forming a cap having a pouring opening.

3. A dosage device, as claimed in claim 2, wherein said coacting securing means comprise respective tenon and recess formations
110 on said side wall and top wall.

4. A dosage device, as claimed in any one of claims 1 to 3, comprising a depending tubular flange on said base wall to receive a dip tube.

5. A dosage device, as claimed in any one of claims 1 to 4, comprising a depending neck having internal threading for engagement on the external threading of a squeeze bottle.

6. A dosage device, as claimed in any one of claims 1 to 5, wherein said axially extending wall means of said compartmented component are constituted by a tube traversed by radial walls.

7. A dosage device, as claimed in claim 6, wherein said radially extending base wall carries an upstanding ring flange with which an end of said tube is slidably engaged.

8. A dosage device, as claimed in any one of claims 1 to 5, wherein said axially extending wall means of said compartmented compo-
130

nent are constituted by two tubes disposed at a spacing one within the other with radial walls traversing the space between them.

- 5 9. A dosage device, for the delivery of a measured quantity of a liquid or a liquid or flowable paste, substantially as described herein with reference to Figs. 1 and 2 of the accompanying drawings.

- 10 10. A dosage device, for the delivery of a measured quantity of a liquid or flowable paste, substantially as described herein with reference to Figs. 3 and 4 of the accompanying drawings.

Printed for Her Majesty's Stationery Office
by Burgess & Son (Abingdon) Ltd, Dd 8991685, 1987.
Published at The Patent Office, 25 Southampton Buildings,
London, WC2A 1AY, from which copies may be obtained.